

(12) UK Patent Application (19) GB (11) 2 365 691 (13) A

(43) Date of A Publication 20.02.2002

(21) Application No 0102836.4

(22) Date of Filing 05.02.2001

(30) Priority Data

(31) 12026350

(32) 03.02.2000

(33) JP

(71) Applicant(s)

NEC Corporation

(Incorporated in Japan)

7-1, Shiba 5-chome, Minato-ku, Tokyo 108-8001,
Japan

(72) Inventor(s)

Kazuo Ogoro

(74) Agent and/or Address for Service

Reddie & Grose

16 Theobalds Road, LONDON, WC1X 8PL,
United Kingdom(51) INT CL⁷

G09G 3/34, H04Q 7/32.

(52) UK CL (Edition T)

H4L LEUA

G5C CA342 CHX

(56) Documents Cited

GB 2354406 A

JP 200153839 A

JP 110341316 A

JP 110205863 A

(58) Field of Search

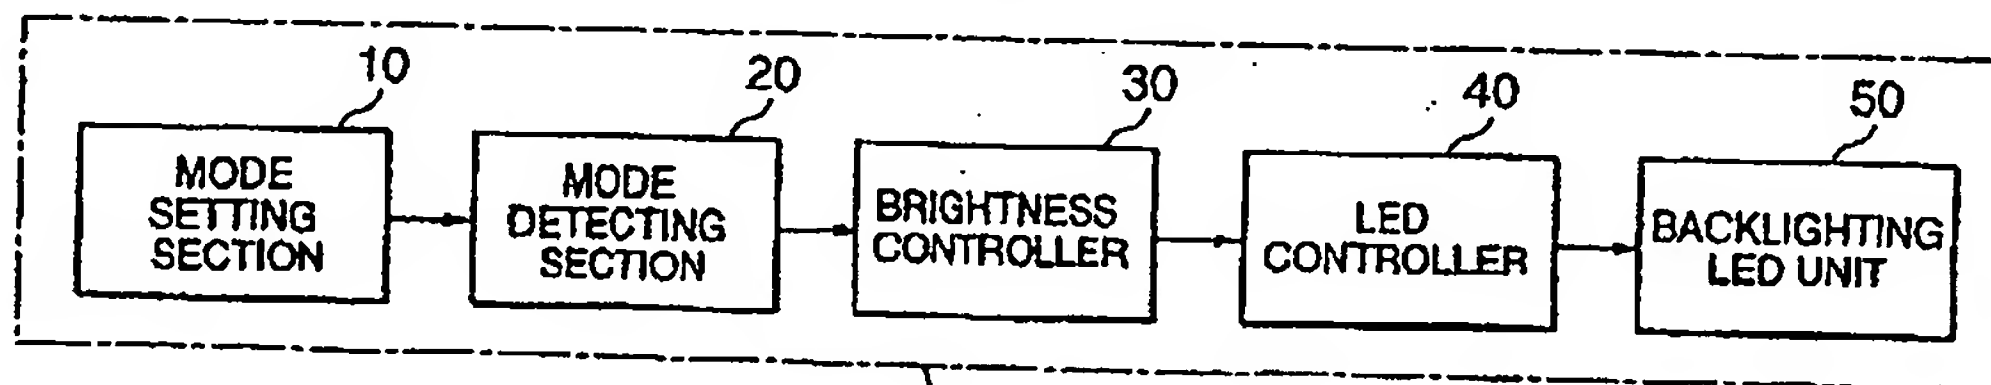
UK CL (Edition S) G5C CHX, H4F FCW, H4L LESF
LEUF LEUG LEUXINT CL⁷ G09F 13/04 13/18, G09G 3/34, H04Q 7/32
ONLINE: WPI, EPODOC, JAPIO, INSPEC

(54) Abstract Title

Brightness control for backlighting device

(57) An electronic apparatus with a backlit display (103) and an input device (102) allows reduced power consumption while maintaining sufficient brightness. A mode detecting section (20) detects the currently set operation mode. The brightness of the backlighting is controlled (30) depending on the currently set operation mode. When the operation mode is a data input mode, the brightness of the backlighting is reduced.

The device may be for example, a mobile telephone, a digital clock including an LCD, a liquid crystal television set or a car navigation system. The mobile phone may have data input, display, communication status display, graphic and text modes. The device may be used for communication, mails, short messages, as a phone directory, scheduling or for games. The brightness may also be adjusted based upon the determined brightness level.

FIG.2**GB 2 365 691 A**